


elements DMX(DMX001)

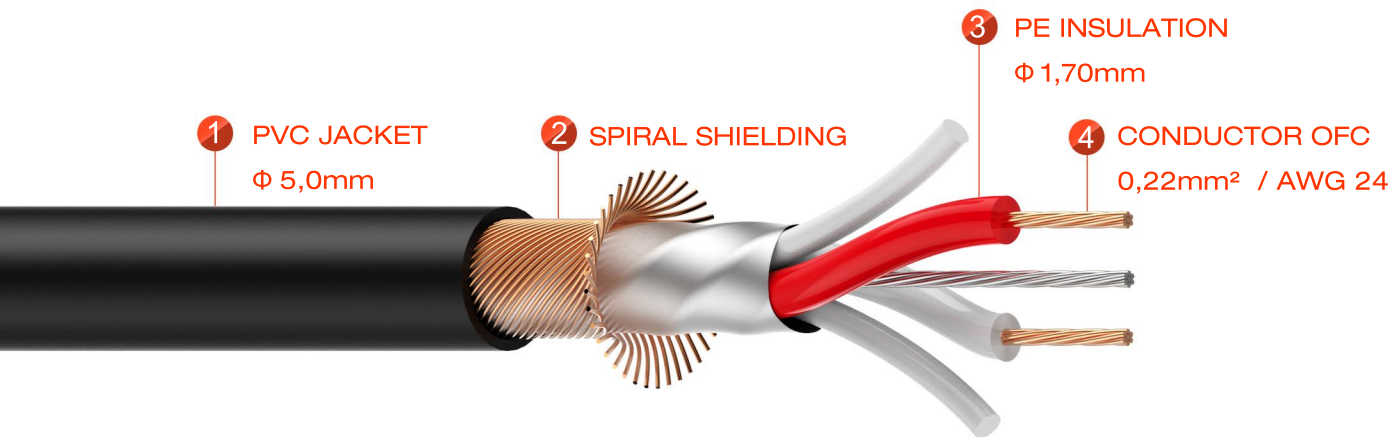

TECHNICAL DATA:

- | | |
|-------------------------------|---|
| • Jacket,diameter | PVC Φ 5,0mm |
| • AWG | 24 |
| • No. of inner conductors | 2x0,22mm ² |
| • Copper strand per conductor | 7x0,20mm |
| • Conductor insulation | PE Φ 1,70mm |
| • Drain Wire | Tin plated copper 10x0,15mm |
| • Shielding | copper spiral shielding with 80x0,10mm
+AL/PT-foil+PE filler |
| • Shielding factor | 100% |
| • Temperature range | min. -20°C |
| • Temperature range | max. +70°C |

ELECTRICAL DATA:

- | | |
|------------------------------|--------------|
| • Capac. cond./cond.per 1 m | 45 pF |
| • Cond. resistance per 1 km | <85 Ω |
| • Insulation resist.per 1 km | >5G Ω |
| • Surge impedance | 120 Ω |